

BLOCTECH I

A1S




Dimensions [mm]
Dimensions [mm]



Accessoires
Accessories




Set pour montage encastré
option with recessed mount kit applied



support pour montage
suspendu
bracket for suspended
mounting



option montage a 30°
mounting option with 30°
bracket applied

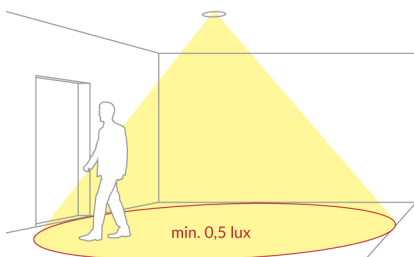

IP65, BAES Ambiance - Anti panique / Zone a risque (450 lm) -
espaces ouverts
IP65, antipanic lighting (450 lm)

Model		
BLOCTECH I A1S 1H 450 TC	1 h	LiFePO4 3.2 V 1.5 AAh
BLOCTECH I A1S 1H 450 D2	1 h	LiFePO4 3.2 V 1.5 AAh

Principales spécifications techniques Technical parameters

Application Application	BAES Ambiance - Anti panique Antipanic lighting
Source lumineuse Light source	2 LED
Autonomie de la batterie Battery operating time	1 h
Mode Mode	M / NM
Flux lumineux Luminous flux	450 lm
Test Testing	D2: DATA/Supervision controle TC: Performance SATI
Alimentation électrique Power supply	210÷250 V AC 50÷60Hz;
Indice de protection Protection degree	IP65
Indice Impacts mécaniques externes Protection against mechanical impacts	IK06
Classe d'isolation Insulation class	II
Températures de fonctionnement Temperature range	$t_3 +10\text{ °C} \div +40\text{ °C}$
Couleurs Colour	RAL 9003 Couleurs speciales / special colour

Photometrie Photometry

[m]			190,5 x 200 x 70 800 mm 1200 mm 400 szt. / pcs
2,5	4,6	11,2	
3,0	5,1	12,5	
4,0	5,7	13,9	
5,0	5,9	15,4	
6,0	6,6	16,2	
7,0	6,7	17,4	
8,0	6,5	18,2	
9,0	6,4	19,5	
10,0	6,4	19,9	

