

BLOCTECH I

AWS




Dimensions [mm]
Dimensions [mm]




Accessoires
Accessories




Set pour montage encastré
option with recessed mount kit applied



support pour montage
suspendu
bracket for suspended
mounting



option montage a 30°
mounting option with 30°
bracket applied

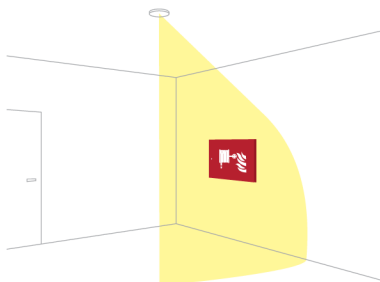

IP65, BAES Ambiance (450 lm)

IP65, Lighting of the final exit / fire-protection devices (450 lm)

Model		
BLOCTECH I AWS 1H 450 TC	1 h	LiFePO4 3.2 V 1.5 AAh
BLOCTECH I AWS 1H 450 D2	1 h	LiFePO4 3.2 V 1.5 AAh

Principales spécifications techniques Technical parameters

Application Application	BAES Ambiance - Anti panique Lighting of the final exit / fire-protection devices
Source lumineuse Light source	2 LED
Autonomie de la batterie Battery operating time	1 h
Mode Mode	M / NM
Flux lumineux Luminous flux	450 lm
Test Testing	D2: DATA/Supervision controle TC: Performance SATI
Alimentation électrique Power supply	210÷250 V AC 50÷60Hz:
Indice de protection Protection degree	IP65
Indice Impacts mécaniques externes Protection against mechanical impacts	IK06
Classe d'isolation Insulation class	II
Températures de fonctionnement Temperature range	t _a +10 °C ÷ +40 °C
Couleurs Colour	RAL 9003 Couleurs speciales / special colour

Photometrie

[m]	A	B	190,5 x 200 x 70
2,5	4,4	10,2	 400 szt. / pcs
3,0	4,8	11,2	
4,0	5,5	13,0	
5,0	5,8	14,4	
6,0	5,7	15,4	
7,0	4,6	15,8	
8,0	3,5	15,2	
9,0	3,5	15	

