


BLOCTECH S

A1S




Dimensions [mm]
Dimensions [mm]

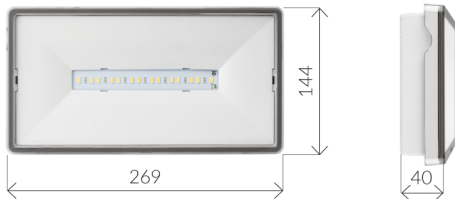

Accessoires
Accessories



option montage encastré
en utilisant le kit
option with recessed mount
kit applied



option montage a 30°
mounting option with 30°
bracket applied

BAES Ambience - IP65 / IP44 - (350 lm)
Antipanic lighting - IP65 / IP44 - (350 lm)

Model



BLOCTECH S A1S 1H 320 TC	1 h	LiFePO4 3.2 V 1.5 AAH
BLOCTECH S A1S 1H 320 D2	1 h	LiFePO4 3.2 V 1.5 AAH

Principales spécifications techniques
Technical parameters

Application Application	BAES Ambience Antipanic lighting
Source lumineuse Light source	14 LED
Autonomie de la batterie Battery operating time	1 h
Mode Mode	M / NM
Flux lumineux Luminous flux	350 lm
Test Testing	D2: DATA/Supervision controle TC: Performance SATI
Alimentation électrique Power supply	210÷250 V AC 50÷60Hz;
Indice de protection Protection degree	IP65 / IP44
Indice Impacts mécaniques externes Protection against mechanical impacts	IK08
Classe d'isolation Insulation class	II
Températures de fonctionnement Temperature range	$t_a +10\text{ °C} \div +40\text{ °C}$
Couleurs Colour	<input type="checkbox"/> RAL 9003 <input checked="" type="checkbox"/> Couleurs spéciales / special colour

Photometrie
Photometry

[m]	H	A	B	270,5 x 40,5 x 150
2,5	3,7	9,0		 800 mm 1200 mm min 0,05L
3,0	4,0	9,6		
4,0	4,3	11,4		
5,0	4,6	12,5		
6,0	4,7	13,4		
7,0	4,8	14,1		
8,0	4,8	14,5		
9,0	4,5	14,8		
10,0	4,0	15,2		

