


BLOCTECH S

E1S



Dimensions [mm]
Dimensions [mm]

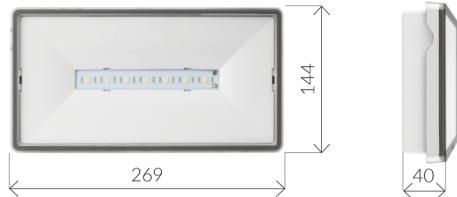

pictogramme universel inclus
universal pictogram included



Accessoires
Accessories




Drapeau BLOCTECH S
BLOCTECH S diffuser



option montage encastré
en utilisant le kit
option with recessed mount
kit applied



option montage à 30°
mounting option with 30°
bracket applied

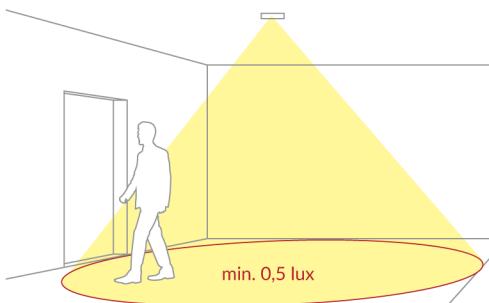

BAES Evacuation - IP65 / IP44 - (120 lm)
Escape route direction - IP65 / IP44 - (120 lm)


Model		
BLOCTECH S E1S 1H 025 TC	1 h	LiFePO4 3.2 V 1.5 AAh
BLOCTECH S E1S 1H 025 D2	1 h	LiFePO4 3.2 V 1.5 AAh

Principales spécifications techniques
Technical parameters

Application Application	BAES Evacuation - Anti panique Escape route direction
Source lumineuse Light source	7 LED
Autonomie de la batterie Battery operating time	1 h
Mode Mode	M / NM
Flux lumineux Luminous flux	120 lm
Test Testing	D2: DATA/Supervision controle TC: Performance SATI
Alimentation électrique Power supply	210÷250 V AC 50÷60Hz;
Indice de protection Protection degree	IP65 / IP44
Indice Impacts mécaniques externes Protection against mechanical impacts	IK08
Classe d'isolation Insulation class	II
Températures de fonctionnement Temperature range	t _a +10 °C ÷ +40 °C
Couleurs Colour	RAL 9003 Couleurs spéciales / special colour

Photometrie
Photometry

[m]	H	A	B	270,5 x 40,5 x 150
2,5	3,2	8,0		
3,0	3,5	8,6		700 szt. / pcs
4,0	3,6	9,7		
5,0	3,7	10,5		
6,0	3,6	11,2		
7,0	3,4	11,5		
8,0	2,4	11,7		
9,0	1,8	11,6		
10,0	-	-		



2 lx
 1 lx
 0,5 lx

